
Quick Change device with integral suction plate VS-SWV-SPS-50-30/25 – for retrofitting for previous version*

- The SWV Quick Change device is simply screwed onto the SPEEDY VS-140/200* in place of the standard suction plate.
 This allows elements up to 50 kg weight to be lifted and laid.
 The former VS-SPS-50-30/25 suction plate then becomes superfluous as it is now integrated
- The SWV Quick Change device allows all new standard suction plates to be mounted in seconds without using tools via 2 quick-change locks
- The SWV can also be retro-mounted on the earlier SPEEDY-VS-140*; existing suction plates must then be retro-fitted with 2 screw-fitted hooks
- The SWV can also be moved through 90 degrees before being screwed onto the SPEEDY; thus allowing the standard suction plates to be used in any preferred alignment





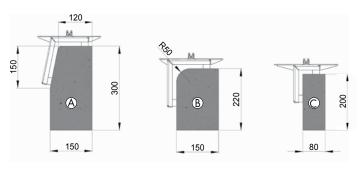

Quick Change device VS-SWV-SPS-50-30/25

(with integral suction plate)

Туре	Suction Plate Dimension in (mm)	Working Load Limit WLL* lbs (kg)	Dead Weight Ibs (kg)	Order- Number
VS-SWV-SPS-50-30/25	1134 x 934" (300 x 250)	110 (50)	4 (2)	42710126

Suction plates for the use of SPEEDY with Quick Change function

Туре	Suction Plate Dimension in (mm)	Working Load Limit WLL** lbs (kg)	Dead Weight Ibs (kg)	Order- Number
VS-GH-SPS-80-40/30	oval 15¾ x 11¾" (400 x 300)	175 (80)	4 (2)	42710129
VS-GH-SPS-100-50/30	oval 19¾ x 11¾" (500 x 300)	220 (100)	6 (2.5)	42710130
VS-GH-SPS-140-70/30	oval 27½ x 11¾" (700 x 300)	310 (140)	7 (3)	42710131
VS-GH-SPS-200-85/340	oval 33½ x 13½" (850 x 340)	440 (200)	25 (11.5)	42710132
VS-GH-SPS	Retro fit kit counter hold suction plate consisting 2 x counter holder + sci	42710127		
Lamellar plugs	1 item; for plugging drilled holes in the suction plates			21070141

Suction plates with counter holder for curb stones

Туре	Suction Plate Dimension in (mm)	Working Load Limit WLL** Ibs (kg)	Dead Weight Ibs (kg)	Order-Number
VS-GH-WSP-150-90/12-15,5-	35" x 5" - 6"	330	15	42720347
101°	900 x 120 - 155	(150)	(6.5)	
VS-GH-WSP-150-70/15,5-	28" x 6" - 7"	330	15	42720360
17-90°	700 x 155 - 170	(150)	(6.2)	
VS-GH-WSP-85-90/8-12-	35" x 3" - 5"	185	15	42720345
90°	900 x 80 - 120	(85)	(6.5)	



[•] Durable surface protection by galvanizing

^{* (}Order-No. 52700011, 12, 13, 14, 07, 08, 09, 10)

^{**} Value at 200 mbar low pressure